

TOP/DBX



Recessed luminaire for BIA/D/G24d/2p type energy-saving compact fluorescent lamps. Lamps are positioned horizontally in twin-lamp models, vertically in single-lamp models. Ultra slim height.

Type TOP/DBX 126 is equipped with built-in power supply unit housed in polycarbonate compartment, the other types are provided with CSA power supply unit as a special accessory, wired for 230V 50Hz with power factor correction; fitted with jacks for quick electrical connection.


Luminaires can be installed on surfaces, which are normally inflammable.

Body: lower part: white self-extinguishing polycarbonate V0-UL94; upper part containing lampholder: black self-extinguishing polyamide V0-UL94.

Reflector: aluminised polycarbonate (99.90% pure aluminium for TOP/DBX 126). It is designed for low brightness and extreme visual comfort. Between the louvre and the body, a clip-fit black polycarbonate ring can be found for hindering of reflections, which must be removed when using other accessories.

Mounting bracket: galvanised hardened steel.

Lampholder: polyamide.

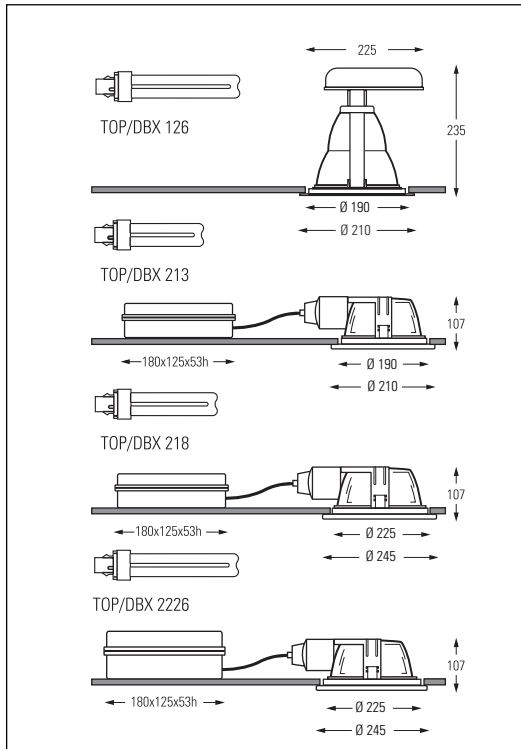


Type	Lamp	Weight (kg)	Pack Qty. Box	Pallet	Product Code
TOP/DBX		Class: <input type="checkbox"/>	<input checked="" type="checkbox"/>		
IP 23 standard version (without protective glass and louvre)					
IP 43 version with louvre (on special request)					
IP 44 version with protective glass (on special request)					
		230V 50Hz	CEI 34.21 / EN 60598-1		
TOP/DBX 213	2 x F13DBX/835/2p	0,38	1	120	32256
TOP/DBX 218	2 x F18DBX/835/2p	0,49	1	96	32302
TOP/DBX 226	2 x F26DBX/SPX/835/2p	0,49	1	96	32262
TOP/DBX 126 *	1 x F26DBX/SPX/835/2p	1,80	1	75	32269

* With built-in supply unit - **Complete with lamp.**

POWER SUPPLY UNIT

Made of black self-extinguishing polyamide V0-UL94 FV 30%, appropriately ventilated; wired for 230V 50Hz; power factor correction, with connecting cable to the luminaire with release connector to the mains.

Type	Weight (kg)	Pack Qty. Box	Pallet	Product Code	
Power supply unit		Class: <input type="checkbox"/>	<input checked="" type="checkbox"/>		
		230V 50Hz			
CSA/DBX 213	0,81	1	360	32270	
CSA/DBX 218	0,81	1	360	32272	
CSA/DBX 226	1,56	1	360	32275	

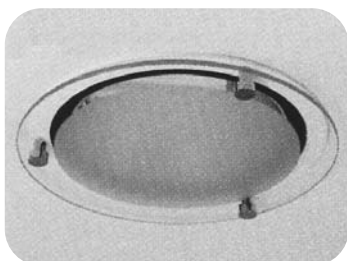

TOP/DBX Accessories and Spare Parts

SILK-SCREENED GLASS

Highly decorative, it enhances the visual comfort. It is fastened with self-extinguishing white polycarbonate trigger to the body on one side and blocked with a spring on the other; thickness 3 mm.

Type	Description	Weight (kg)	Pack Qty. Box	Product Code
Accessories				
TOP/GLASS				
TOP/GLASS 213-126	Silk-screened glass for versions 2x13W and 1x26W	0,166	10	32281
TOP/GLASS 218-226	Silk-screened glass for versions 2x18W and 2x26W	0,240	10	32284

DARK-LIGHT LOUVRE

It eliminates glare and is particularly suitable for environments with video terminals. Made from ABS metallized in vacuum. It is fastened with trigger onto a self-extinguishing ring in white polycarbonate vaxed to the body on one side and fixed with spring onto the other.

Type	Description	Weight (kg)	Pack Qty. Box	Product Code
Accessories				
TOP/LOUVER				
TOP/LOUVER 213-126	Louvre dark-light for versions 2x13W and 1x26W	0,061	6	32288
TOP/LOUVER 218-226	Louvre dark-light for versions 2x18W and 2x26W	0,098	6	32289

Spare parts				
TOP/RING				
TOP/RING 213-126	Black anti-reflection ring for versions 2x13W and 1x26W	0,032	10	32291
TOP/RING 218-226	Black anti-reflection ring for versions 2x18W e 2x26W	0,035	10	32301