


EURO 2 & EURO 7

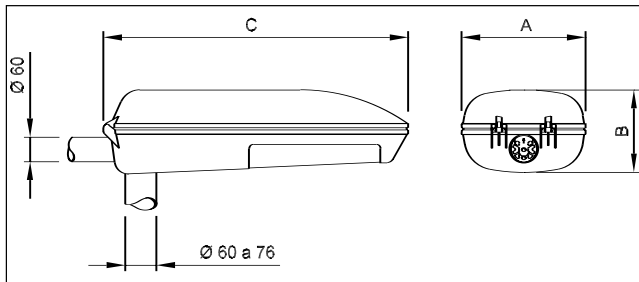

mm	A	B	C
EURO-7	251	366	855
EURO-2	205	318	743

Applications

Street, roadway, highway, residential area and parking lot lighting.

Suggested mounting heights: 6 - 12 m (EURO-2) and 9 - 16 m (EURO-7).

Maximum lamp wattage: 600W (EURO-7)

Features

- Enclosed luminaires for pole and post-top mounting.
- Two component die-cast aluminium housing: top and bottom. Finished with polyester powder paint. Standard colour: grey. Many colour options available.
- Ballast components mounted on a tray.
- Silicone sealed optics.
- ALGLAS finish on hydroformed aluminium faceted reflector.
- Tempered clear curved glass.
- Standard E40 or E27 base socket (depending on lamp). Mogul available on request.
- Selectable lamp position, depending on photometric needs. 28 lamp position available
- Easy access to ballast compartment and lamp by opening the top housing. Lamp replacement without tools.
- Tilting capability between 0° and 10°.

Type	Lamp	Weight (kg)	Pack Qty.	Pallet Qty.	Product Code
EURO 2					
	Class: I	Optic	IP 66		
	230V 50Hz	Housing	IP 44  IP64 10 request		
EURO2 70 S CL1 230V	HPS 70W	10,50	1	12	17285
EURO2 100 S CL1 230V	HPS 100W	11,00	1	12	17307
EURO2 150 S CL1 230V	HPS 150W	12,00	1	12	17289
EURO2 250 S CL1 230V	HPS 250W	13,50	1	12	17290

Lamp excluded

Type	Lamp	Weight (kg)	Pack Qty.	Pallet Qty.	Product Code
EURO 7					
	Class: I	Optic	IP 66		
	230V 50Hz	Housing	IP 44  IP64 10 request		
EURO7 250 S CL1 230V	HPS 250W	16,00	1	6	17291
EURO7 400 S CL1 230V	HPS 400W	19,00	1	6	17293

Lamp excluded

